

bilz

Formbore – System Tools

Convert spindle rotation
to linear tool movement



**EXCELLENT FOR
PROFILE PROCESSING**

Unique: Formbore system tools

With Formbore system tools, internal and external profiles can be generated in a variety of shapes and sizes. Pre-machining the forms, drilling and milling operations basically pre-form the desired shapes followed by the linear action of the Formbore cutting tool which delivers the required profile on conventional machining centers.

Formbore system tools can be used on:

- Milling machines
- Machining centres
- Lathes
- Special purpose machines


ADVANTAGES


Formbore system tools work independently of the machines spindle. It doesn't have to be synchronized, can be calculated and programmed for the machine spindle. Formbore system tools are ideal for conversion of rotational movement to linear movement, Process routes can therefore be optimised by complete machining of specific forms on one machine. Formbore System tools reduce the processing time in comparison to the previously known procedures considerably.

When used on machining centers and milling machines, a stopper arm is required which can be adapted to any machine with the supply of basic information.

The Formbore system tool stands for practical versatility and flexibility. In addition, using the Formbore system tool delivers considerable time and cost savings.

Not least size control of the final contour is easily maintained with a scale adjustment on the formbore head controlling the position of the cutting edge. Convince yourself about the advantages of Formbore system tools! Contact us with your processing requirements, you will receive our solution based recommendation.

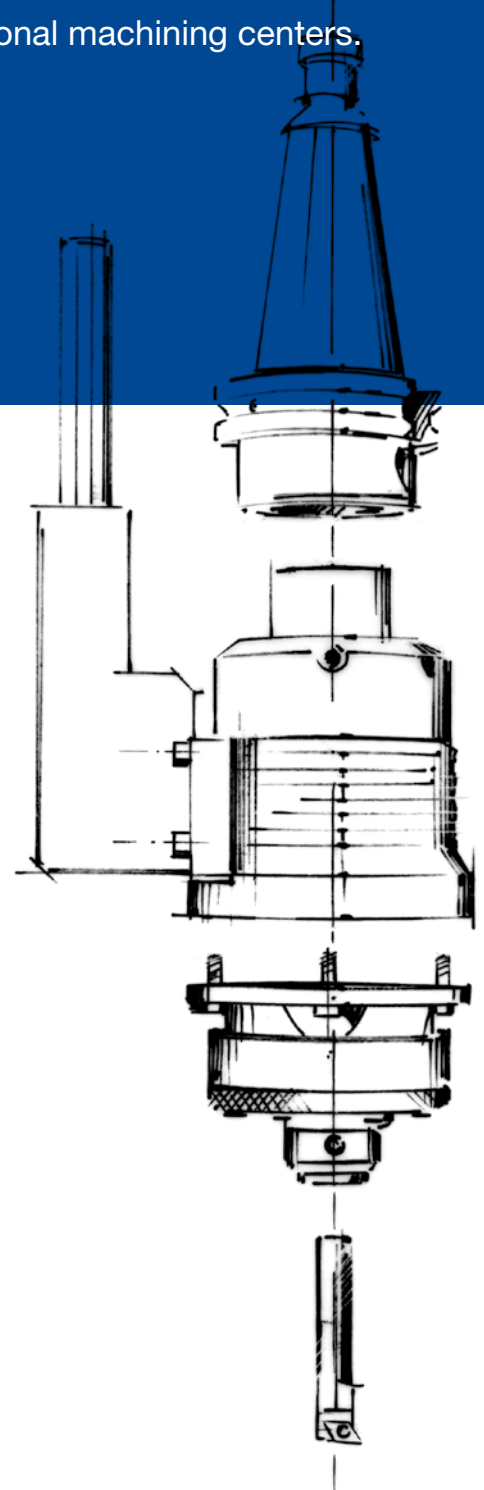

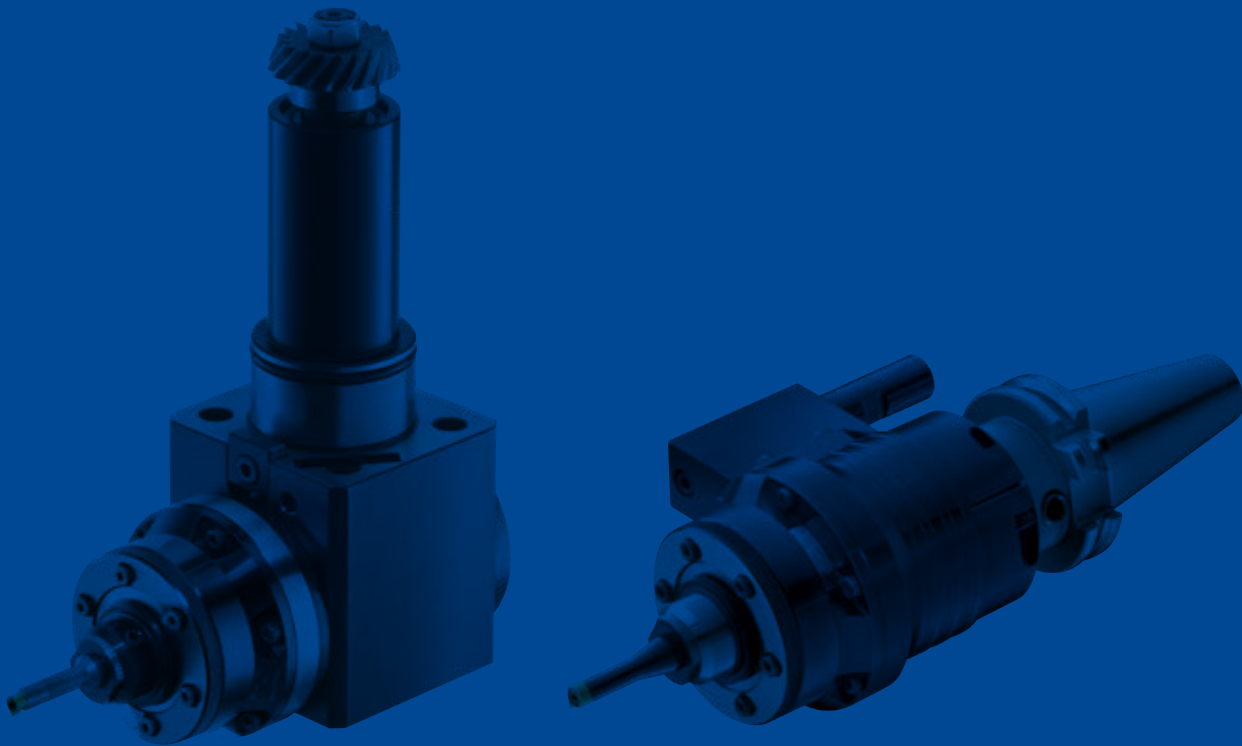

TECHNICAL INFORMATION

DESIGN AND MODE OF OPERATION OF THE FORMBORE SYSTEM TOOLS:

Formbore system tools essentially consist of two components: the drive and the profiling head. The rotating drive shaft is mounted in a housing.

The torque-assisted control element defines the movement sequence of the profiling head. The direction of the cutting edge is generated by rolling elements and the profiling cam.

For internal machining, a pilot hole is first made, up to max.... 0.5 mm diameter smaller than the wrench size (SW). With a profile-adapted speed and feed that corresponds to the material being machined, the required profile and the roughing process may be completed in one operation..

Formbore cam blocks



The following profiles can be produced:

Square	Hexagon	Octagon	Area at the cylinder	Spanner size
04	06	08	01	02

Further profiles on request

Order example:


FBK 1 04 - 0810 / 1

1	= Variant 1 (e.g. Corner radius)
0810	= Measurement square= 8,10 mm
04	= Square
1	= Cam block for formbore system tool Size 1
FBT	= Formbore cam block

Versions available



Formbore system tools for machining centres, milling and drilling machine applications

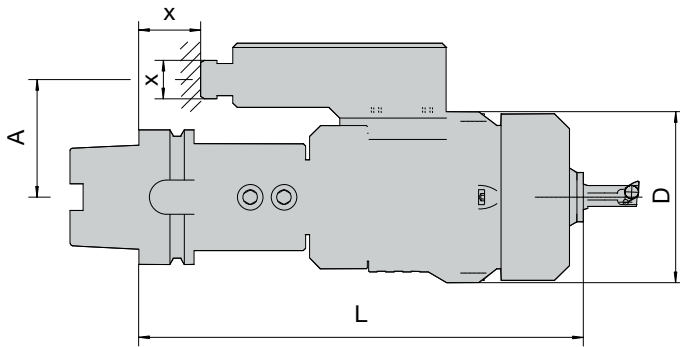

order example:

FBT 2 / 2 9 . 2 2


22 = Type MCH-300
 29 = Machine manufacturer Heller
 2 = Formbore Size 2
 FBT = FormBoreTool

L = Dependent on the machine interface
X = Dimensions acc. machine specification

Description	A mm	n^{\max} mm ⁻¹	Ø D mm	Profile (spanner size) mm	
FBT 1/...	³ 51	1000	80	Square: SQ4-14	Hexagon: SW4-21
FBT 2/...	³ 51	500	125	Square: SQ4-22	Hexagon: SW4-38

Further versions available on request

Formbore system tools for turning machine applications

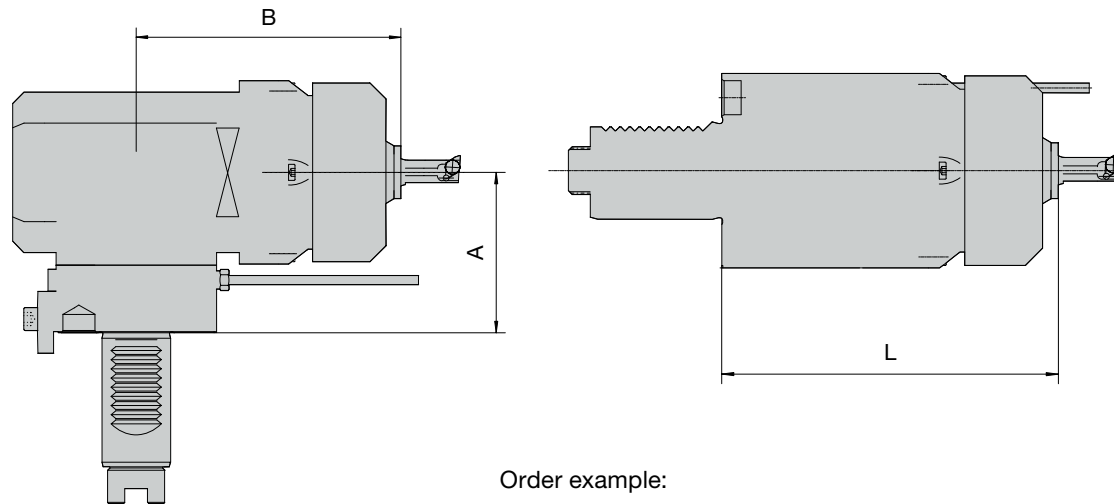

Order example:

FBT 2 / 1 00 . 1

1 = Type G200/V160
 100 = Machine manufacturer Index
 2 = formbore Size 2
 FBT = FormBoreTool

A, B, L = Dependent on the machine interface

Description	n^{\max} mm ⁻¹	Profile (spanner size) mm	
FBT 1/...	1000	Square: SW4-14	Hexagon: SW4-21
FBT 2/...	500	Square: SW4-22	Hexagon: SW4-38

Further versions available on request

Formbore accessories



NOTE:

Please include a drawing of the required contour with all enquiries and orders in order to define the exact form requirements.


The following Formbore boring bars/profiling tools work in combination with the Formbore cam-block to achieve the desired forms.

Formbore accessories for Boring bar/profiling tool




Identification of the formbore Boring bar/profiling tools

ASI 12 0700 / X

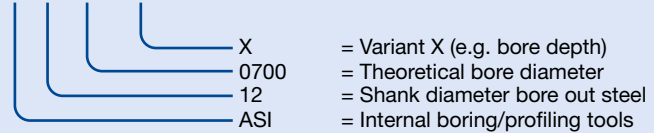


The bore out steels The profiling tools are coordinated designed in combination with the geometry of the respective cam block.

Formbore accessories for external profiles

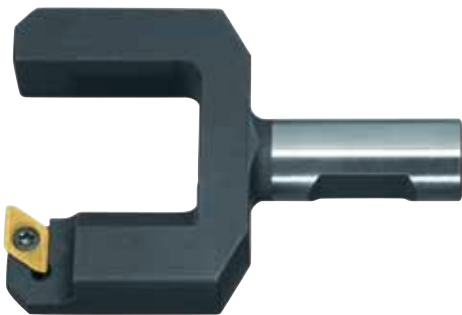

Identification of the formbore over turning tools


ASA 12 0700 / 1

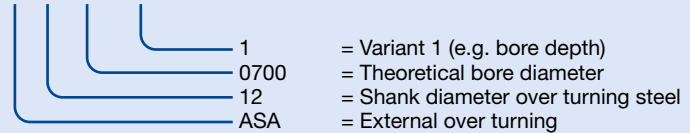



The external-turning tools are designed in combination with the geometry respective cam-block.

Insert holder for external applications and larger internal profiles	Description
	ASA-26.00-07
	ASA-31.00-07
	ASA-38.00-07

Boring bar	Description
	ASA-26/00-ABS40-44
	ASA-31/38-ABS40-44

Female square SQ 12 mm	Speed	Feed	Machine
	550 min ⁻¹	0,04 mm/1	Lathe

Hexagon SQ 22 mm	Speed	Feed	Machine
	400 min ⁻¹	0,06 mm/1	Special machine

Keyway SQ 8 mm, depth 20 mm	Speed	Feed	Machine
	550 min ⁻¹	0,03 mm/1	Lathe
	<p>Comment: Interrupted cut</p>		



**BILZ WERKZEUGFABRIK
GmbH & Co. KG**
Vogelsangstr. 8
73760 Ostfildern
Deutschland / Germany
Telefon +49 711 348 01 - 0
Telefax +49 711 348 12 56
info@bilz.de
www.bilz.de



台北 02-2703-0193
台中 04-2463-6890
www.gcarbideool.com



*Produktions- und Vertriebsstandorte der LEITZ-Group
Production and sales locations of the LEITZ Group*

- **Bilz**
- **Boehlerit**
- **Leitz**